




L620s SCREEN PLANT

The L620s screen plant features the 6'x20' (1830mm x 6096mm) screen, along with a flex shaft screen drive and cross conveyors or front chute, making it the leader in the market. Wide conveyor belts make it easy to handle any application, while improving production and reducing the bottle necks in crushing circuits.

- Triple shaft screen box
- Features under screen belt
- Available with either two- or three-deck screen
- Includes cross conveyors as standard
- Ideal for an application

L620s

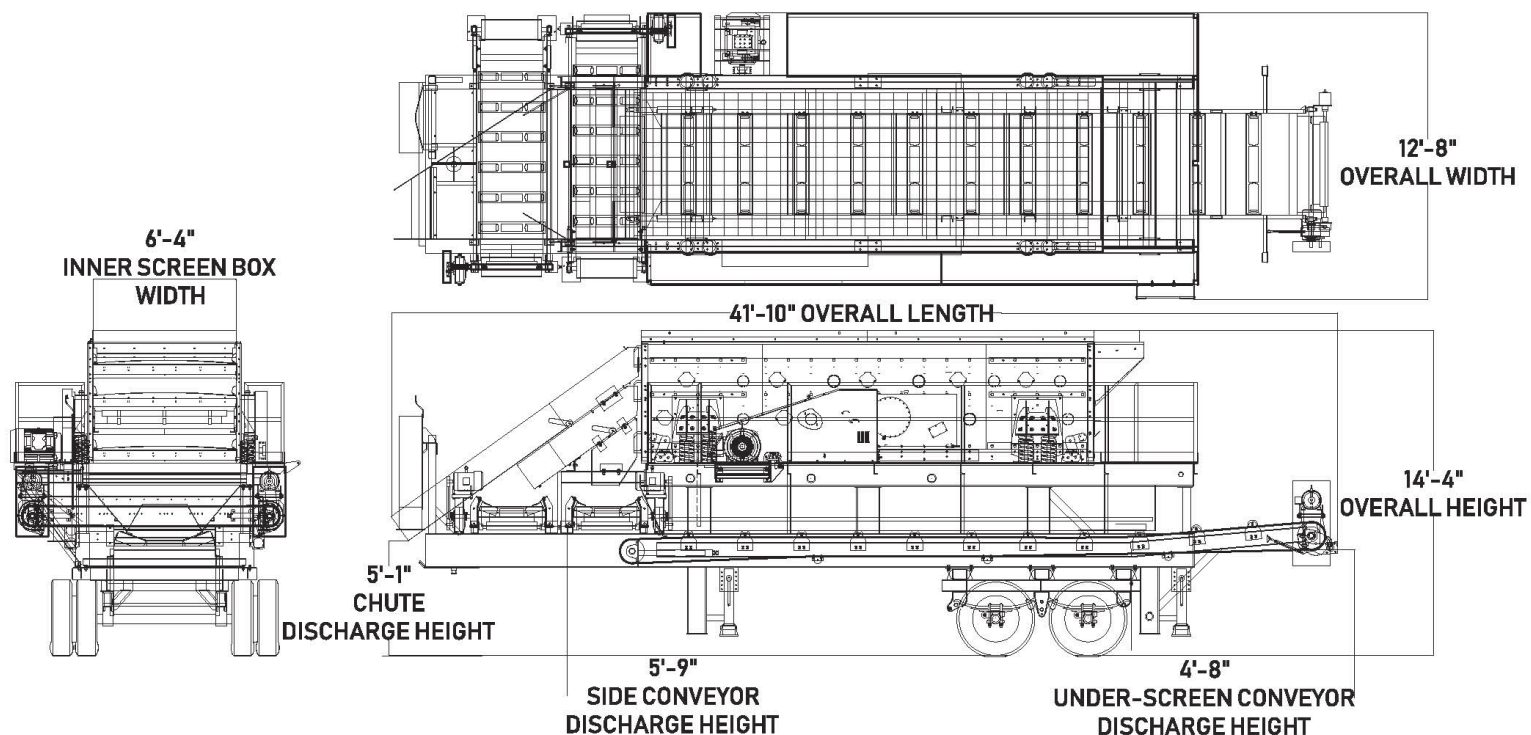

SPECIFICATIONS

| | | | | | |
|----------------------|-----------|----------------|-----|----------------|---------|
| Screen Size | 6'X20' | Horsepower | | Transportation | |
| Decks | 3 | Screen | 40 | Tires | 11R22.5 |
| Screen Speed | 810 | Cross Conveyor | 7.5 | Rear axle | 37,000 |
| Cross Conveyor | 30"X10'6" | Cross Conveyor | 7.5 | King Pin | 21,000 |
| Operating Speed | 303 | Underscreen | 10 | Total | 58,000 |
| Cross Conveyor | 30"X10'6" | | | | |
| Operating Speed | 303 | | | | |
| Underscreen Conveyor | 48"X30' | | | | |
| Operating Speed | 300 | | | | |

ADDITIONAL OPTIONS

Hydraulic leveling jacks - (4) 70,000lb

Six (6) Run-On Jack Legs

NEMA - 12 motor control center

Cross conveyor under grizzly

Hydraulic folding hopper extensions

Taper Wedge Lock

Tire bulkheads