THE **3447j-w** IS A QUALITY HIGH TONNAGE CRUSH



The 34x47 wheeled plant has been developed to be a high tonnage crusher with both the ease of maintenance and transportability. The 34" gape allows you to feed a 27.5" rock with ease. The jaw also features an opposing wedge design that allows the producer to make adjustments easily and safely.

- 48" single toggle jaw c/w 200 HP motor
- Integrated motor mount
- · Open wheeled chassis for ease of maintenance
- · Heavy duty chassis for semi towing
- Heavy duty 4 axle spring suspension
- · Chassis cable hooks
- Fast setup time
- 30" cross conveyor for grizzly bypass

- Three discharge conveyor options:
 - A. 12'-9" discharge, single scraper, impact idlers. Only available with self-cleaning permanent magnet.
 - B. 15'-6" folding, single scraper, impact idlers. Only available with self-cleaning permanent
 - C. 16'-3" folding, dual scraper, Brunon impact bed. Only available with stationary electro-magnet.
- Optional chassis mounted hammer
- Optional electrical control panel cable termination box as standard

- · Optional manual or hydraulic lift off panel if panel option is selected)
- · Feeder grizzly options
 - 4-1/2" spacing5-1/2" spacing

 - 7" spacing
- Hopper options Manual lift off
 - No wings (AR liners)
 - 16ft width w/wings (AR liners) Hydraulic lift off
 - No wings (AR liners)
 - No wings (rubber liners)
 - 20ft width w/wings (rubber liners)
 - 16ft width w/wings (AR liners)
 - Tipping grid (AR liners)


LIPPMANN

3447j-w TECHNICAL SPECIFICATIONS

SPECIFICATIONS		
Jaw Crusher	34" x 47"	
Feed Size	27.5"	
Discharge Conveyor	54"	
Side Conveyor	30"	
Pan Feeder	51" x 20'	
Bypass Chute Std	Optional	
Electric Motor (no diesel drive option)	200HP	
Grizzly Section	5'	

TRANSPORT DIMENSIONS		
Length	60'-10"	
Height	13'-7"	
Width	11'-4''	

TRANSPORT WEIGHTS (EST.) LBS.		
Plant Gross (conveyor option B)	130,700	
Quad	65,800	
King Pin	64,900	
Hopper (16ft wing, AR liner)	67,500	

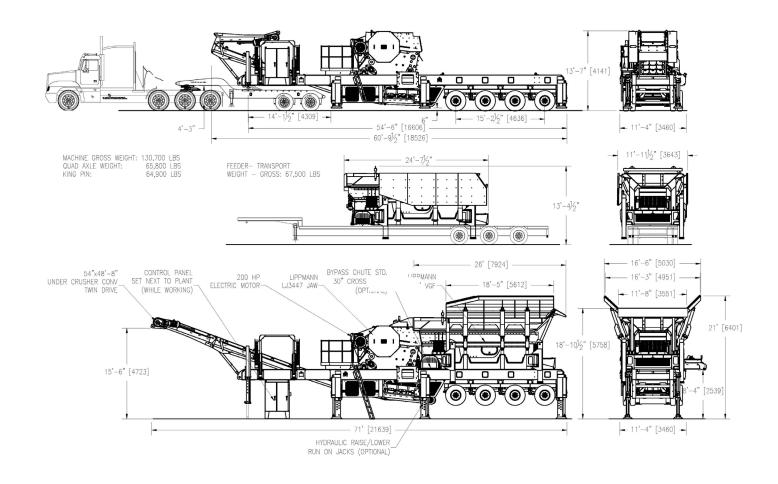

LIPPMANN

3271 East Van Norman Avenue Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486

AUTHORIZED DISTRIBUTOR