THE **L620s-w** SCREENER IS THE MARKET LEADER



The L620s-w screen plant features the 6'x20' (1830mm x 6096mm) screen, along with a flex shaft screen drive and cross conveyors or front chute, making it the leader in the market. Wide conveyor belts make it easy to handle any application, while improving production and reducing the bottle necks in crushing circuits.

- Triple shaft screen box
- Available with either two- or three- deck screen
- · Features under screen belt
- Ideal for an application
- Includes cross conveyors as standard



L620s-w TECHNICAL SPECIFICATIONS


SPECIFICATIONS	
Screen size	6'X20'
Decks	3
Screen speed	810
Cross conveyor	30"X10'6"
Operating speed	303
Cross conveyor	30"x10'6"
Operating speed	303
Underscreen conveyor	48"x30'
Operating speed	300

HORSEPOWER		
Screen	40	
Cross conveyor	7.5	
Cross conveyor	7.5	
Underscreen	10	

TRANSPORTATION		
Tires	11R22.5	
Rear axle	37,000	
King pin	21,000	
Total	58,000	

ADDITIONAL OPTIONS

- Hydraulic leveling jacks (4) 70,000lb
- Six (6) run-nn jack legs
- NEMA 12 motor control center
- Cross conveyor under grizzly
- Hydraulic folding hopper extensions
- Taper wedge lock

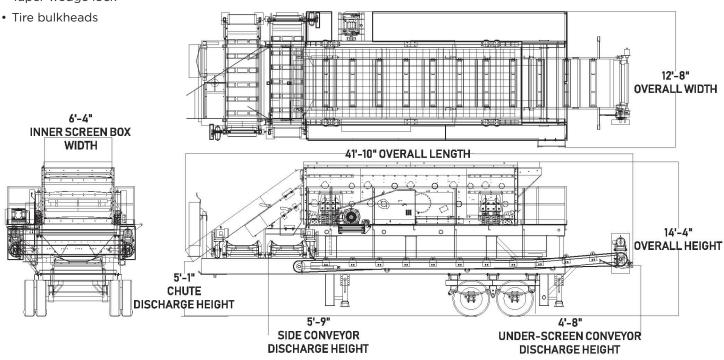

LIPPMANN

3271 East Van Norman Avenue Cudahy, WI 53110

Lippmann-Milwaukee.com

800-648-0486

AUTHORIZED DISTRIBUTOR